

SCM 100-10 **SCM 100-14** **SCM 100-18**

**ELETTROPOMPA SOMMERSA
MULTISTADIO PER POZZI 4"**

***MULTISTAGE SUBMERSIBLE
PUMP FOR 4" WELLS***



EUROMATIC

ELETTROPOMPA SOMMERSA MULTISTADIO PER POZZI 4" MULTISTAGE SUBMERSIBLE PUMP FOR 4" WELLS

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C
(per un uso domestico secondo EN 60335-2-41)
Temperatura max. liquido: 35°C (per altri impieghi)
- Profondità immersione 20 mt.
- Contenuto di sabbia 60 g/m³
- Partenza/ora 20 max.

MOTORE

- Motore elettrico ad induzione a 2 poli
(n = 2850 min⁻¹)
- Isolamento Classe F
- Protezione IP 68
- Servizio continuo
- Cavo alimentazione 20 mt.
30 mt (100-18)

MATERIALI

- Camicia esterna Acciaio Inox
- Albero motore Acciaio Inox
- Supporti Acciaio Inox
- Stadi e giranti Policarbonato

OPERATING CONDITIONS

- Liquid temperature up to 35°C
(for home use according to EN 60335-2-41)
Temperature max. liquid: 35°C (for other uses)
- Submersion depth 20 m
- Sand content 60 g/m³
- Start/hour 20 max

MOTOR

- Two-Pole induction motor
(n = 2850 min⁻¹)
- Insulation Class F
- Protection IP 68
- Continuous duty
- Power cable 20 mt.
30 mt. (100-18)

MATERIALS

- External casing Stainless Steel
- Motor shaft Stainless Steel
- Support Stainless Steel
- Stages and impellers Polycarbonate

Indice di efficienza minimo (BEP) MEI ≥ 0,4
Minimum efficiency index (BEP) MEI ≥ 0,4



SCM 100 - 10




SCM 100 - 14



SCM 100 - 18

TIPO - TYPE			
P1	1350 W	1800 W	2300 W
Voltage	230 V	230 V	230 V
Frequency	50 Hz	50 Hz	50 Hz
Ampere	6 A	8 A	10 A
Q max.	100 l/1'	110 l/1'	110 l/1'
H max.	77 m	105 m	136 m
DNM - DNA	1" 1/4	1" 1/4	1" 1/4
Dimensions (P x L x H)	150 x 1060 x 150 mm	150 x 1220 x 150 mm	150 x 1420 x 150 mm
Weight	16,5 kg	20,3 kg	25,4 kg

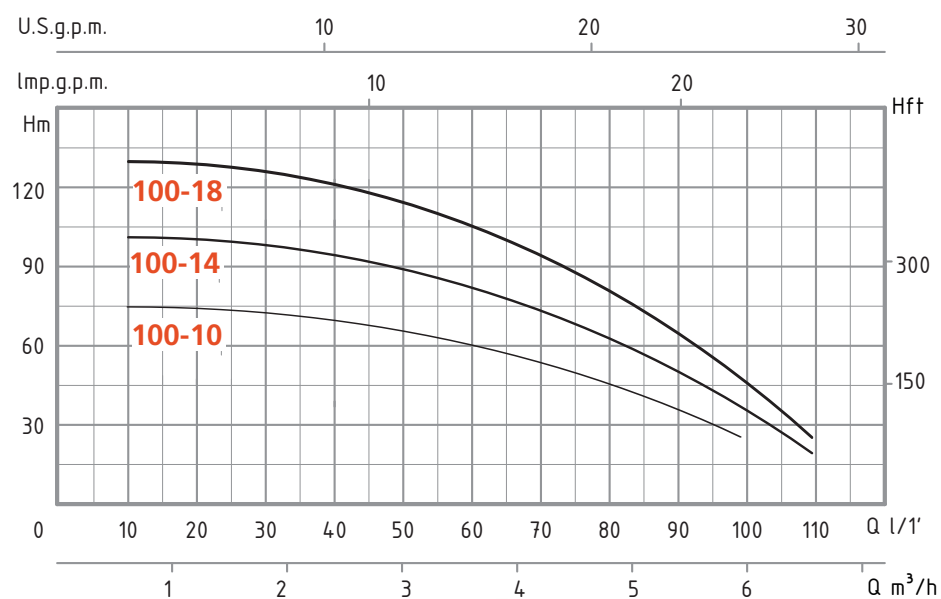



42024 Castelnovo di Sotto (Reggio Emilia) - Italy Via S. Biagio, 59

Tel. +39.0522.487011 - Fax (Italy) +39.0522.487019 - Fax (World) +39.0522.683070

www.speroni.it • speroni@speroni.it